


## ▼ 3.7/02

### Cylindrical Pharma Container Type 90

**Stainless steel pharma container with symmetrical outlet cone**

**Upper base and cone jointed over massive ring, all seams butt-welded, smoothed and polished, patented stainless steel valve with clamp closing and hand lever, upper base with ventilating tube**



- ▼ **7.4 Lid**
- formed sealing surface
  - exchangeable

- ▼ **7.5 Clamping ring**
- airtight closing
  - sealable
  - exchangeable

- ▼ **7.8 Sealing**
- in food grade quality
  - exchangeable

- ▼ **7.3 Upper base**
- conical
  - smooth-walled
  - rim with edging

- ▼ **7.2 Cone**
- body smooth-walled
  - angle of repose 90°
  - use for easy flowing bulk material

- ▼ **7.6 Valve with hand lever type MC**
- dust-tight
  - continuously adjustable
  - sealable
  - easy to clean
  - easy to assemble

- ▼ **7.1 Outlet tube**
- for dust-free docking

- ▼ **7.8 Accessories**
- sight glass
  - handles
  - label-holders

- ▼ **6.2 Carriages**





## Cylindrical Pharma Container Type 90

3.7/02 ▼

**Material:**

All parts made of stainless steel AISI 304 or AISI 316L


Valve flanges and valve disk made of stainless steel AISI 316L

Clamp and hand lever made of stainless steel AISI 304

Sealing made of silicone food grade quality

**Surface:**

All parts inside and outside polished and brushed to a 320 grit

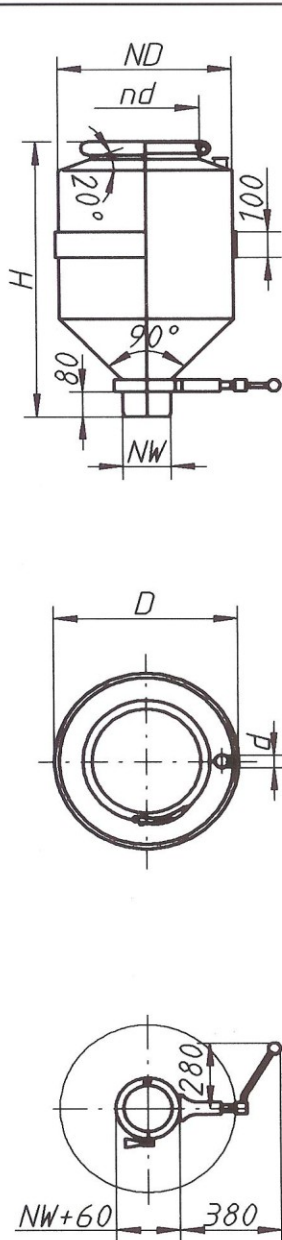

| NW  | H    | D    | d  | nd  | s   | G   | V    | W | ART. NR. | ND   | L* |
|-----|------|------|----|-----|-----|-----|------|---|----------|------|----|
| 200 | 956  | 470  | 20 | 315 | 1,2 | 31  | 100  | 1 | 0101317  | 450  |    |
| 200 | 956  | 470  | 20 | 315 | 1,2 | 31  | 100  | 3 | 0101318  | 450  |    |
| 200 | 1271 | 470  | 20 | 315 | 1,2 | 35  | 150  | 1 | 0101319  | 450  |    |
| 200 | 1271 | 470  | 20 | 315 | 1,2 | 35  | 150  | 3 | 0101320  | 450  |    |
| 200 | 974  | 580  | 32 | 375 | 1,2 | 37  | 150  | 1 | 0101321  | 560  |    |
| 200 | 974  | 580  | 32 | 375 | 1,2 | 37  | 150  | 3 | 0101322  | 560  |    |
| 200 | 1177 | 580  | 32 | 375 | 1,2 | 40  | 200  | 1 | 0101323  | 560  |    |
| 200 | 1177 | 580  | 32 | 375 | 1,2 | 40  | 200  | 3 | 0101324  | 560  |    |
| 200 | 1081 | 620  | 32 | 450 | 1,5 | 49  | 200  | 1 | 0101325  | 600  |    |
| 200 | 1081 | 620  | 32 | 450 | 1,5 | 49  | 200  | 3 | 0101326  | 600  |    |
| 200 | 1435 | 620  | 32 | 450 | 1,5 | 56  | 300  | 1 | 0101327  | 600  |    |
| 200 | 1435 | 620  | 32 | 450 | 1,5 | 56  | 300  | 3 | 0101328  | 600  |    |
| 250 | 1144 | 730  | 32 | 560 | 1,5 | 60  | 300  | 1 | 0101329  | 710  |    |
| 250 | 1144 | 730  | 32 | 560 | 1,5 | 60  | 300  | 3 | 0101330  | 710  |    |
| 250 | 1397 | 730  | 32 | 560 | 1,5 | 67  | 400  | 1 | 0101331  | 710  |    |
| 250 | 1397 | 730  | 32 | 560 | 1,5 | 67  | 400  | 3 | 0101332  | 710  |    |
| 250 | 1414 | 830  | 50 | 600 | 2,0 | 99  | 500  | 1 | 0101333  | 800  |    |
| 250 | 1414 | 830  | 50 | 600 | 2,0 | 99  | 500  | 3 | 0101334  | 800  |    |
| 250 | 1613 | 830  | 50 | 600 | 2,0 | 106 | 600  | 1 | 0101335  | 800  |    |
| 250 | 1613 | 830  | 50 | 600 | 2,0 | 106 | 600  | 3 | 0101336  | 800  |    |
| 300 | 1452 | 990  | 50 | 600 | 2,0 | 123 | 700  | 1 | 0101337  | 950  |    |
| 300 | 1452 | 990  | 50 | 600 | 2,0 | 123 | 700  | 3 | 0101338  | 950  |    |
| 300 | 1593 | 990  | 50 | 600 | 2,0 | 130 | 800  | 1 | 0101339  | 950  |    |
| 300 | 1593 | 990  | 50 | 600 | 2,0 | 130 | 800  | 3 | 0101340  | 950  |    |
| 300 | 1456 | 1230 | 50 | 600 | 2,0 | 152 | 1000 | 1 | 0101341  | 1200 |    |
| 300 | 1456 | 1230 | 50 | 600 | 2,0 | 152 | 1000 | 3 | 0101342  | 1200 |    |
| 300 | 1632 | 1230 | 50 | 600 | 2,0 | 162 | 1200 | 1 | 0101343  | 1200 |    |
| 300 | 1632 | 1230 | 50 | 600 | 2,0 | 162 | 1200 | 3 | 0101344  | 1200 |    |

NW = nominal diameter outlet tube, H = container height, D = outside diameter, d = nominal diameter ventilating tube, nd = nominal diameter inlet tube, s = sheet thickness, G = weight in kg, V = volume in litres, W1 = stainless steel AISI 304, W3 = stainless steel AISI 316L, ND = nominal diameter container, L ● = available from stock, L ○ = to be preferred